





MATERIAL: 1.2 mm Steel / Powder Coating RAL7035 / 9005


Load Capacity: 2000kg

DIMENSIONS(mm)


SIZE	W	H	D	X
MR.GTN12U66.XX	600	671	600	542
MR.GTN16U66.XX	600	849	600	772
MR.GTN20U66.XX	600	1027	600	950
MR.GTN22U66.XX	600	1116	600	1039
MR.GTN26U66.XX	600	1294	600	1217
MR.GTN32U66.XX	600	1560	600	1483
MR.GTN36U66.XX	600	1738	600	1661
MR.GTN40U66.XX	600	1916	600	1839
MR.GTN42U66.XX	600	2005	600	1928
MR.GTN46U66.XX	600	2183	600	2106

PERFORATED DOOR OPTIONS


XX_PRF63	FRONT SINGLE PERFORATED-REAR DOUBLE PERFORATED
XX_OPRF63	FRONT SINGLE PERFORATED-REAR SOLID METAL(W600 SINGLE / W800 DOUBLE)
XX_ODPRF63	FRONT DOUBLE PERFORATED-REAR SOLID METAL(W600 SINGLE / W800 DOUBLE)
XX_APRF63	REAR SINGLE PERFORATED-FRONT GLASS (W600 SINGLE / W800 DOUBLE)
XX_ADPRF63	REAR DOUBLE PERFORATED-FRONT GLASS (W600 SINGLE / W800 DOUBLE)
XX_OADPRF63	FRONT DOUBLE PERFORATED-REAR DOUBLE PERFORATED
XX_OAPRF63	FRONT SINGLE PERFORATED-REAR SINGLE PERFORATED
XX_ODAPRF63	FRONT DOUBLE PERFORATED- REAR SINGLE PERFORATED
XX_NOPRF63	ANGLED FRONT FERFORATED-REAR SOLID METAL (W600 SINGLE / W800 DOUBLE)
XX_NPRF63	ANGLED FRONT FERFORATED-REAR DOUBLE PERFORATED

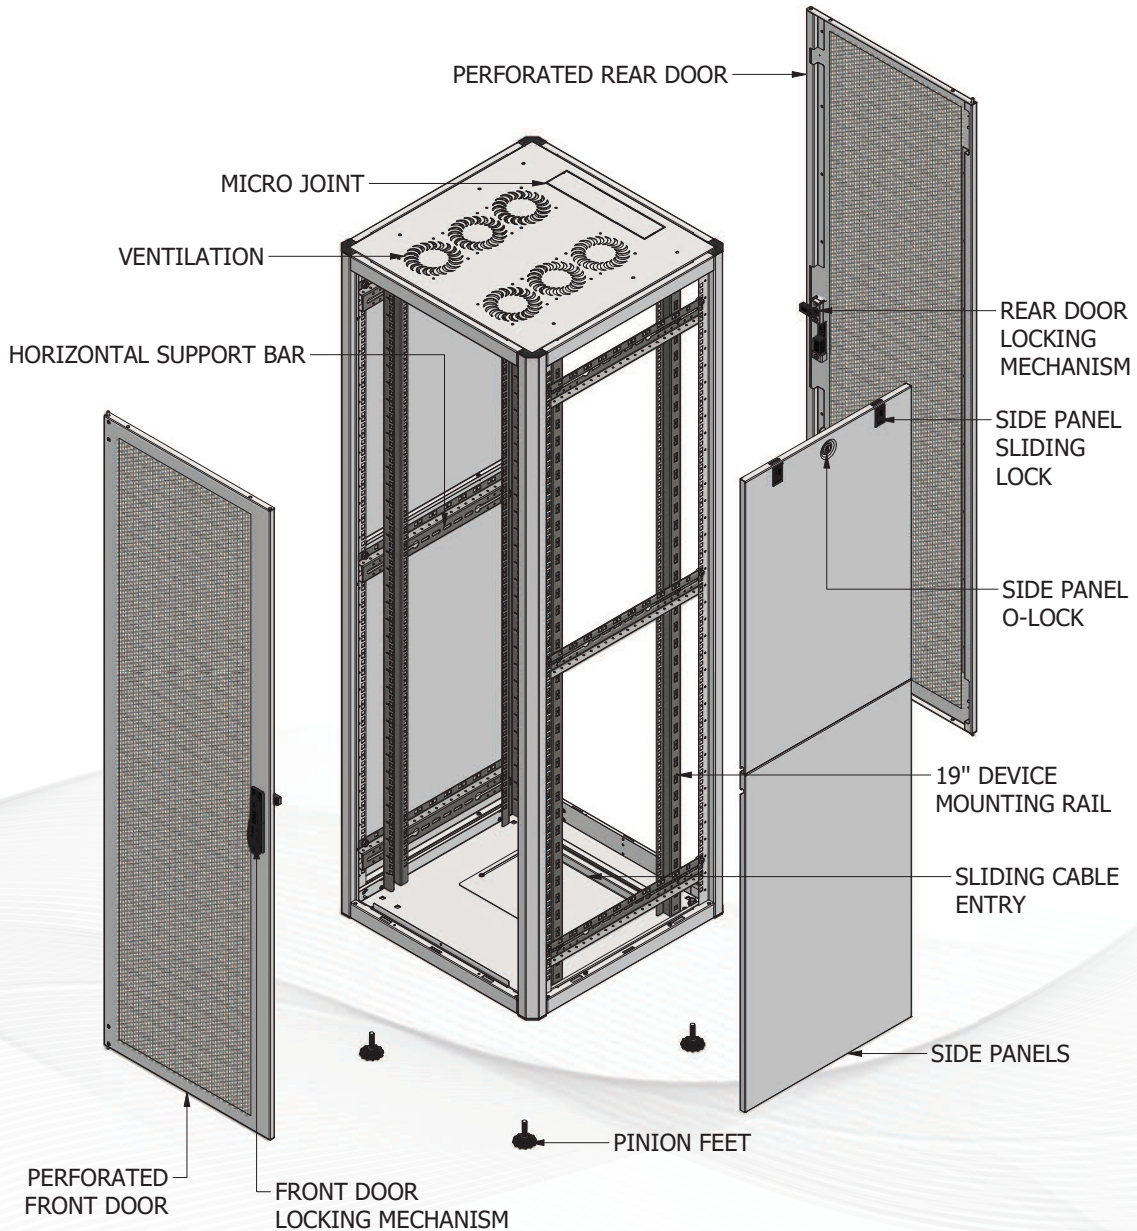

Front View

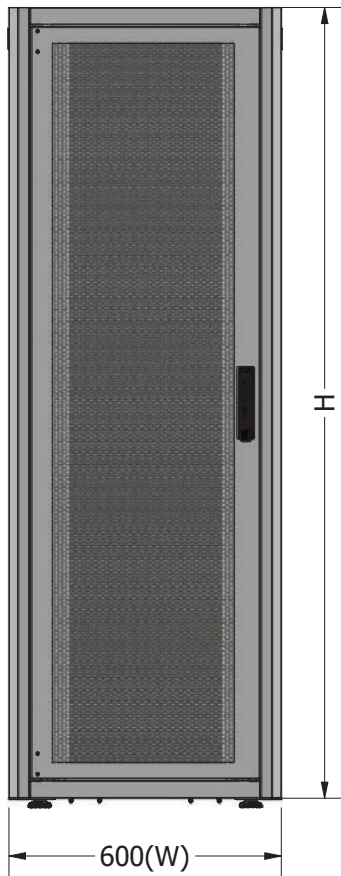


Side View

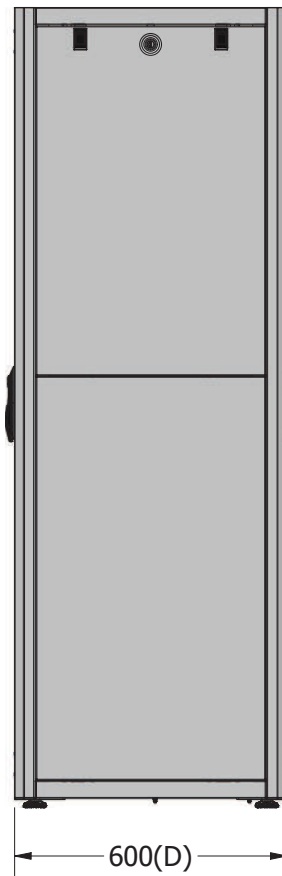


Rear View




Top View



Front View

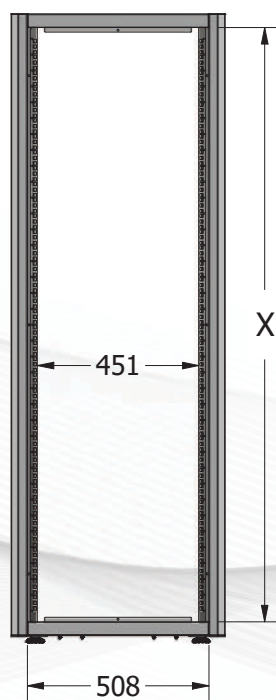

Side View

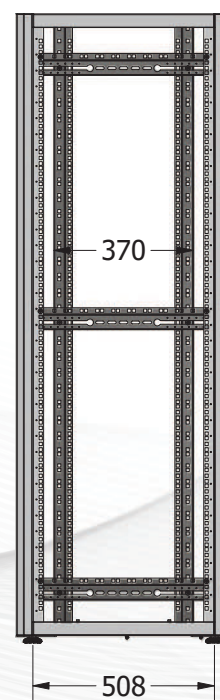

Bottom View

